











Anti Peeping Password

You can add any number before and after the effective password when necessary.





Garbled Input



Correct Input



Garbled Input















A Full Range of Professional Tests

More Durable, More Reliable

12-Month Battery Life

300,000 Times of Fingerprint Reading Test

100,000 Times of Handle Turning Test

96 Hours of Salt Spray Test

-10°C - 55°C Working Temperature

< 4.8V Low Power Alert

Secure Structure and Exquisite Craft




Ergonomic Design



One-Piece Panel Design



Built-in Doorbell



Matte texture frame & handle



In-Mould Lamination (IML) technology



zinc alloy one-piece design



Easy to Use for Every Family Member










The Elder


Friends, relatives and nannies



K2 Dimension

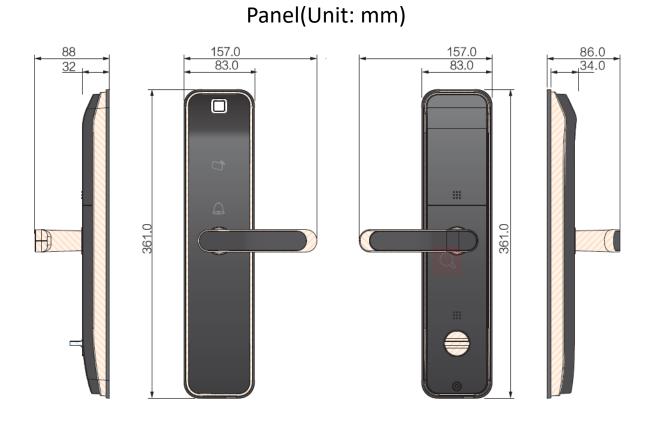

Lock Body(Unit: mm)





K2 Specification

l	Name	Imou K2 Smart Lock	Power	4*1.5V "AA" battery Micro USB(Emergency)
	Model	K2	Low Battery Warning	< DC4.8V
l	Door Thickness	45-95mm (customizable)	Battery Life	12 months (10 units/D)
(Card Capacity	50	Product Standard	GA701-2007
I	Password Capacity	50	Working Temperature	-10~+55°C
1	Fingerprint Capacity	50	Relative Humidity	10%~93%